

VOK 135/120



**LONG life**  
30.000h




Back Shutter



Mounting Bracket




Dimensions /mm/

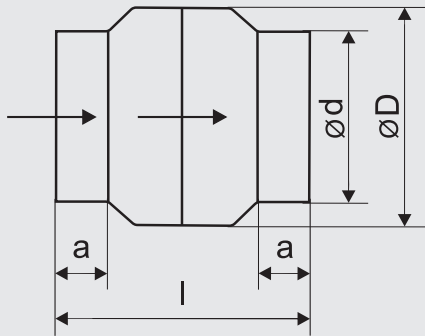



Type	a	l	Ød	ØD
135/120	27	135	120	135

Performance curves

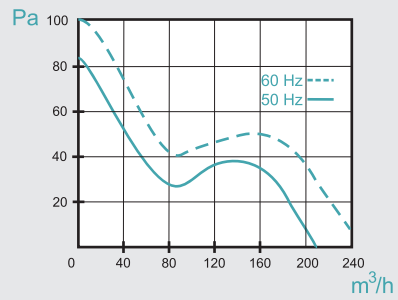


Technical characteristic

Supply Voltage	Maximum Flow Rate	Consumed power	Maximum Flow rate	Max static pressure	Consumed current	Protection Degree	Noise Level	Weight	Max Air t°	Product Code	With Back Shutter Accessory
Hz / V	min <sup>-1</sup>	W	m³/h	Pa	A	IP	dB	Kg	°C	No	No
50 / 230	2650	42	205	85	0,340	44	41	1,340	+60	2143	2150
50 / 115	2650	42	205	85	0,680	44	41	1,340	+60	-	7469
50 / 12	2650	42	205	85	3,000	44	41	1,340	+60	-	-
60 / 120	3360	51	250	100	0,701	44	47	1,340	+60	-	-

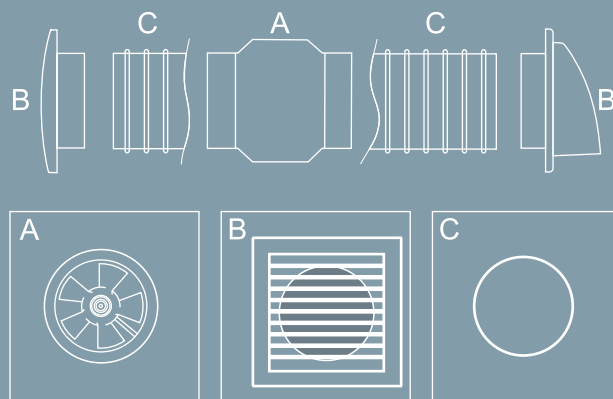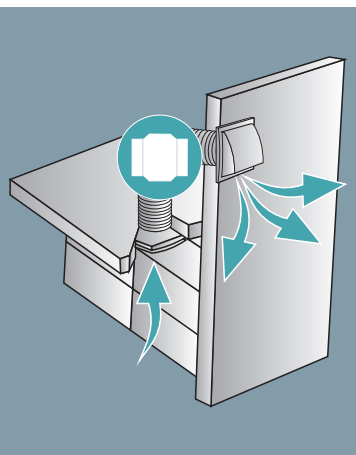

MOUNTING BRACKET	
Product Code	
-	-
-	-
-	-
-	-

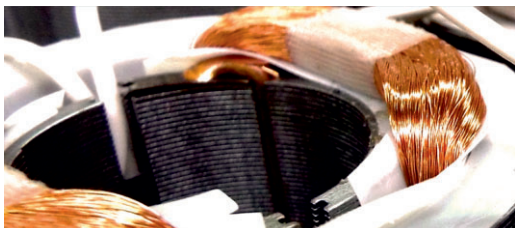

Trickle Impregnation Technology

- Sealed motor against dust and moisture
- Maximum isolation characteristics
- Longevity of the electric motor



- All VOK series fans can be produced with length "l" to suit most specific requirements of our customers.
- All fans can be manufactured to operate at 60 Hz frequency, without significant change in the remaining characteristics.

- Products without a code are custom made.